

764

PISTON SEAL

*Double-Acting
Polyurethane Face with Pre-Loaded O-Ring*

DESIGN

The Hallite 764 double-acting piston seal is a compact, low friction seal for light to medium duty applications. The advanced face geometry gives the Hallite 764 single-acting capabilities making it an excellent choice for double-acting applications where minimal dynamic leakage is required.

The Hallite 764 is comprised of a tough, wear resistance-thermoplastic polyurethane face seal which is pre-loaded by a NBR O-ring. The housing width allows a narrow width piston to be used.

We recommend that an adequate bearing, such as the Hallite 506 or 87 bearing strip, is mounted on one or both sides of the seal. For further details of bearing grooves, please refer to the appropriate product data sheet.



FEATURES

- Double-acting seal with single-acting capabilities
- Advanced face geometry provides enhanced dynamic and static sealing
- Excellent wear resistance and high extrusion resistance
- More tolerant to contamination
- Rapid recovery after assembly
- Operates on wide range of surface finishes
- Ideal for use with Hallite 506 or 87 bearing

MATERIALS

As standard, this product comes in the following materials. Contact your local Hallite technical team if you would like to find out if this profile can be made in a custom material to suit your application. For further material details, please refer to the Hallite Material Table.

MATERIAL OPTIONS	Name	Face Type	Face Colour
Standard	Hythane® 361- NBR	TPU-AU	Orange



TECHNICAL DETAILS

OPERATING CONDITIONS	METRIC	INCH
Maximum Speed	1.0 m/sec	3.0 ft/sec
Temperature Range	-30°C +110°C	-22°F + 230°F
Maximum Pressure	250 bar	3600 psi

NOTE

Data given are maximum values and can apply depending on specific application. Maximum ratings of temperature, pressure, or operating speeds are dependent on fluid medium, surface, gap value, and other variables such as dynamic or static service. Maximum values are not intended for use together at the same time, e.g. max temperature and max pressure. Please contact your Hallite technical representative for application support.

MAXIMUM EXTRUSION GAP			
Pressure bar	100	160	250
Maximum Gap mm	0.60	0.50	0.40


NOTE

Figures show the maximum permissible gap all on one side using minimum rod \varnothing and maximum clearance \varnothing . Refer to Housing Design section.

SURFACE ROUGHNESS	μmRa	μmRz	μmRt	μinRa	μinRz	μinRt
Dynamic Sealing Face $\varnothing D_1$	0.1 - 0.4	1.6 max	4 max	4 - 16	63 max	157 max
Static Sealing Face $\varnothing d_1$	1.6 max	6.3 max	10 max	63 max	250 max	394 max
Static Housing Faces L_1	3.2 max	10 max	16 max	125 max	394 max	630 max

CHAMFERS & RADII				
Groove Section $\leq S$ mm	3.75	5.50	7.75	10.50
Min Chamfer C mm	2.00	2.50	5.00	5.00
Max Fillet Rad r_1 mm	0.40	0.80	1.20	1.60

TOLERANCES	$\varnothing D_1$	$\varnothing d_1$	L_1
mm	H9	h9	+0.20 -0

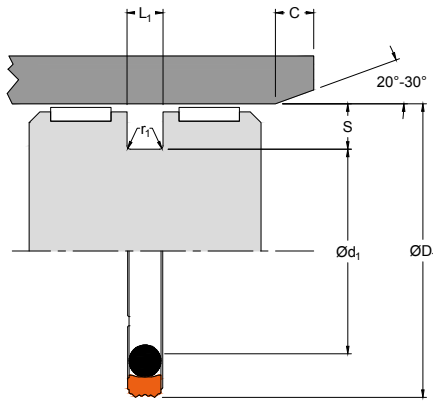

764

PISTON SEAL

*Double-Acting
Polyurethane Face with Pre-Loaded O-Ring*


PART NUMBER RANGE

METRIC					
ØD ₁	TOL H9	Ød ₁	TOL h9	L ₁ +0.20-0	PART No.
12.00	+0.04 0.00	7.10	0.00 -0.04	2.20	4845110
22.00	+0.05 0.00	14.50	0.00 -0.04	3.20	4763610
32.00	+0.06 0.00	21.00	0.00 -0.05	4.20	4751210‡
32.00	+0.06 0.00	24.50	0.00 -0.05	3.20	4741010‡
35.00	+0.06 0.00	24.00	0.00 -0.05	4.20	4764110
40.00	+0.06 0.00	29.00	0.00 -0.05	4.20	4741110‡
45.00	+0.06 0.00	34.00	0.00 -0.06	4.20	4744510
50.00	+0.06 0.00	34.50	0.00 -0.06	6.30	4775810‡
50.00	+0.06 0.00	39.00	0.00 -0.06	4.20	4741210‡
55.00	+0.07 0.00	44.00	0.00 -0.06	4.20	4845310
60.00	+0.07 0.00	44.50	0.00 -0.06	6.30	4739910‡
60.00	+0.07 0.00	49.00	0.00 -0.06	4.20	4741310‡
63.00	+0.07 0.00	47.50	0.00 -0.06	6.30	4766810‡
63.00	+0.07 0.00	52.00	0.00 -0.07	4.20	4740810
65.00	+0.07 0.00	54.00	0.00 -0.07	4.20	4845410
70.00	+0.07 0.00	54.50	0.00 -0.07	6.30	4759710
70.00	+0.07 0.00	59.00	0.00 -0.07	4.20	4741410

NOTE

Part numbers suffixed by "‡" indicate housing sizes to meet ISO 7425-1.



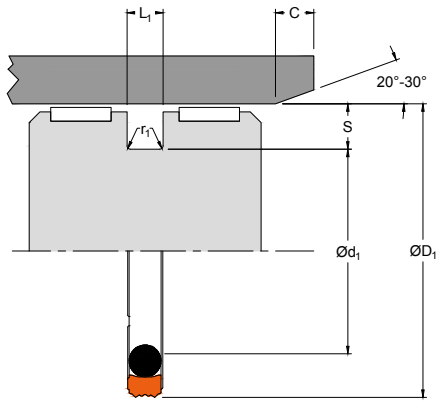

PART NUMBER RANGE

METRIC					
ØD ₁	TOL H9	Ød ₁	TOL h9	L ₁ +0.20-0	PART No.
75.00	+0.07 0.00	64.00	0.00 -0.07	4.20	4845510
80.00	+0.07 0.00	64.50	0.00 -0.07	6.30	4722210‡
80.00	+0.07 0.00	69.00	0.00 -0.07	4.20	4845610
90.00	+0.09 0.00	74.50	0.00 -0.07	6.30	4741510
100.00	+0.09 0.00	84.50	0.00 -0.09	6.30	4741610
115.00	+0.09 0.00	94.00	0.00 -0.09	8.10	4829910
115.00	+0.09 0.00	99.50	0.00 -0.09	6.30	4761610
120.00	+0.09 0.00	99.00	0.00 -0.09	8.10	4812010
125.00	+0.10 0.00	109.50	0.00 -0.09	6.30	4771710‡
NOTE Part numbers suffixed by "‡" indicate housing sizes to meet ISO 7425-1.					